


YFZ 450 Throttle Position Sensor Bypass Plug **Installation Instructions**

The throttle position sensor is located on the left side of your carburetor. It is the black plastic sensor on the middle side of your carburetor. There is a bundle of wires that leave the sensor and go forward and up to the wire harness along the frame. It is located under the plastic.



- 1) As you can see in the photo, simply unplug the TPS from the wire harness.
- 2) The plug that remains on the wire harness side will receive the Sparks Racing TPS Bypass Plug.

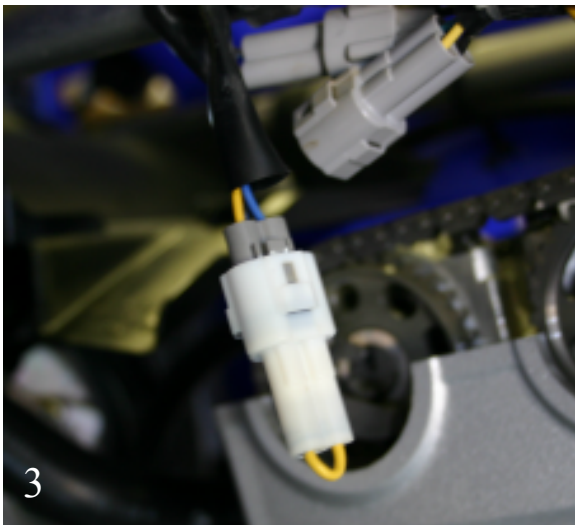

- 3) This is what the plug looks like connected to the wire harness.
- 4) Now you simply take the wires and tuck them up out of the way. The TPS plug from the carburetor also needs to be tucked up out of the way. Now get out there and ride your YFZ 450.

If you have any questions, please don't hesitate to call us Monday – Friday 8:30am – 5:30pm PST (661) 872-4343 www.sparksracing.com